



LANDSCAPE WALL | KEYSTONE GARDEN WALL®

KEYSTONE Garden Wall®

A do-it-yourself retaining wall tradition, Keystone Garden Wall is perfect for landscape walls up to 2-feet (610mm) in height as well as tree rings, edging, raised gardens and borders. Utilizing the rear-lip alignment method, Garden Wall easily builds straight, curved or terraced walls to fit the contours of your yard. Keystone Garden Wall is known as Castle Wall in some markets.



Available in
Gray - Tan - Rose
\$3.95 ea



Unit Dimensions:
4" h x 12" w x 9" d
(102mm x 305mm x 229 mm)

Weight: 29 lbs (13 kg)

Units/sq.ft.: 3

FEATURES & BENEFITS

Perfect For:

- Small walls up to 2' (610mm) high
- Planters
- Tree rings
- Garden borders
- Edging

Installation & Versatility

- Easy to handle, the unit's interlocking rear lip design requires no special tools for installation.
- Build to fit the contours of your yard by creating straight, curved or terraced walls.

Beauty and Performance

- The beauty of quarried stone combines with earth tone color blends to enhance any landscape.
- High-strength concrete blocks create a durable project that is virtually maintenance-free.

Note: Unit color, dimensions, weight & availability varies by manufacturer.





LANDSCAPE WALL | KEYSTONE GARDEN WALL®

KEYSTONE Garden Wall®

INSTALLATION INSTRUCTIONS



1. Prepare Wall Location

Start by digging a shallow trench 4" (102mm) deep by 12" (305mm) wide. Cut through and remove any sod, roots or large rocks. For organic loam soils, dig 4" (102mm) deeper and add a leveling pad of sand or gravel. Compact and level the soil to receive the first course of Keystone Garden Wall.



2. Place & Compact Backfill

Place and level the first Keystone Garden Wall unit. Level each additional unit on the base course as you place it, making sure that the outside edges touch. If your wall contains both straight and curved areas, start with a straight area and build into the curves. Complete the base course before proceeding to the second course.



3. Install Additional Courses

Starting with straight areas first, begin placing the second course. Center each unit on the seams of the course below in a running bond pattern as shown. Now proceed to the next layer, backfilling as you go. For drainage behind the wall, clean gravel or crushed stone is recommended.



Remove Edges

To remove outside lugs or edges of retaining lip, hold unit securely or place at angle on ground. Strike the lug firmly with a hammer. Always wear safety glasses to protect eyes from chips.



Building Curves

Curves as small as 2'-2" (660mm) in radius can be built with Keystone Garden Wall. Convex & concave course bonding will adjust sideways. If stack bond occurs, remove rear interlock lip as shown or cut units accordingly to get back to running bond.

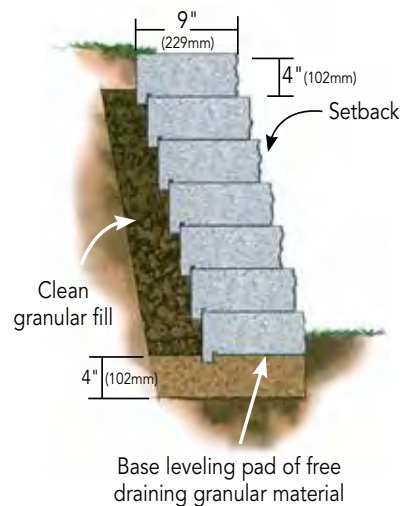

Typical Garden Wall Section

Use clean granular backfill such as gravel or crushed stone for drainage and to prevent soil from leaching through the wall. A commercial filter fabric (stocked by most garden supply stores) may be used when existing site soils are used for backfill.



4492 E. Fairview Loop, Wasilla, AK 99654
907-376-4784
www.valleyblockandconcrete.com



Keystone Retaining Wall Systems LLC • A Contech Company
4444 West 78th Street • Minneapolis, MN 55435
(952) 897-1040 • www.keystonewalls.com

©2017 Keystone Retaining Wall Systems LLC

